

M20240 TIE DOWN ANCHOR KIT

Owner's Manual



OVERVIEW

The Tie Down Anchor Kit is a set of adjustable tie down points for your truck bed raiser or rack system. Quickly adjusted and easily accessed, each tie down anchor is slid into place using the T-slot in the truck bed raiser or rack crossbars, and tightened into place using a wing bolt and t nut. Hook your straps, secure your cargo, and clamp the loose ends of the straps using the built in clamps.

STEP 1

Loosely assemble (4) Wing Bolts and (4) T Nuts together on the Tie Down Anchors as shown.



STEP 2

Slide the assembled Tie Down Anchors into the T-Slots of the Truck Bed Raiser or rack crossbars. They work best and are designed for the Truck Bed Raiser, but they can also work on the rack crossbars as well. Tighten all of the Wing Bolts by hand to secure them in place.





STEP 3

After the tie downs are slid into place, insert the ball locking pin in the end cap near the tailgate to prevent any accessories from falling off the truck as a safety precaution.



STEP 4

Secure your cargo. Make sure to not overtighten the straps. If the Truck Bed Raiser sidemember is flexing, make sure the bottom bolts on each Truck Bed Raiser clamp are threaded in and touching the side of your bed to give it more strength to prevent from flexing. Also, make sure the top bolt on each clamp is threaded in and touching as well.

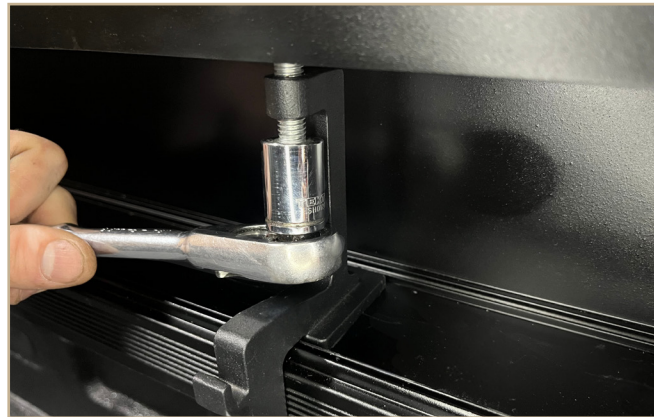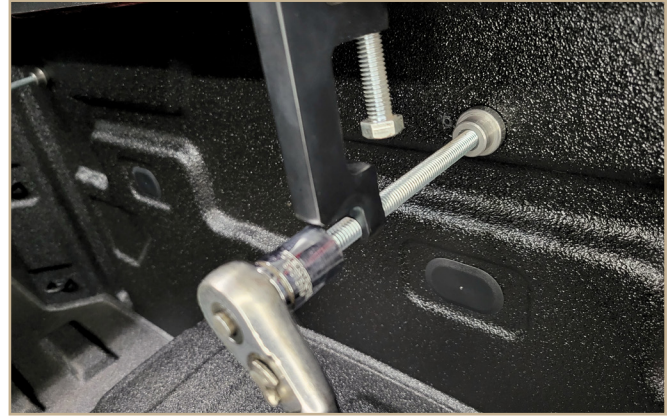

STEP 5

Wrap up the loose ends of each strap, and clamp them in place.



STEP 6

If your Wing Bolts are stuck when trying to loosen them, you can break them loose with a flathead screwdriver or crescent wrench.

Warning and Safety Instructions

- Make sure that your cargo is secured after strapping it in place. Never drive with loose accessories or cargo on your truck.
- The Tie Down Anchor Kit is designed to work with light, 1" ratchet straps. Do not attempt to use bigger straps or overtighten as this can damage your Truck Bed Raiser.
- Always reinstall the ball lock pin near the rear of the Truck Bed Raiser on both sides of the truck to prevent accessories from falling off if not tightened.
- The Wing Bolts and T Nuts should only be tightened by hand.
- Never exceed the working load limit of straps.

Replacement/new parts can be found on our website: Truckify.com

- M20240 Tie Down Anchor Kit
- A16026 Wing Bolt T Nut Kit

Returns

All returned products must have prior authorization from Truckify before they are shipped back to our facility. Returned products without pre-authorization are not eligible for credit. There will be a 20% restock fee on returned items. Products must be returned within 60 days of the date of sale to be eligible for credit. To request a return, go to our website, Truckify.com, under returns, to submit a return.

Warranty

This product comes with a limited one year warranty. Products manufactured by Truckify are warranted to be free of defects due to faulty material or workmanship for 12 months from the date of purchase. Normal wear and tear is not considered a defect in material or workmanship. Liability under this warranty is limited to the replacement of the defective part provided that the following conditions are met:

- Truckify is promptly notified in writing of such defect immediately upon discovery, and the defective product is returned for inspection
- The defect is not due, without limitation, to faulty installation, misalignment of the product, vibration, pressure pulsations, ordinary wear and tear, corrosion, ultraviolet degradation, operation outside the product specified limits and using the product for uses other than its intended use



877-885-4994

Truckify.com

support@truckify.com

9479 County Road E,
Arpin, WI 54410

