

A26005 SKI/FISHING POLE MOUNT KIT

Owner's Manual



OVERVIEW

Thank you for purchasing our Ski/ Fishing Pole Mount Kit. This is a great way to haul fishing poles, skis, ski poles, snowboards, kayak paddles, waterskis, shovels, and many other things. Almost anything less than 1.5" in diameter and less than 20 pounds can be mounted on this kit. The mounts can be fastened to a couple of different locations, either on top of our rack crossbars or on our molle plates.

Tools Needed for Installation: $\frac{1}{16}$ Ratchet and Socket & $\frac{1}{16}$ Wrench

STEP 1

For mounting on our rack crossbars, start by loosely assembling (2) Wing Bolts and T Nuts in each of the mounting plates. Each of them only use one side of the mounting brackets to mount.



STEP 2

Adjust your rack crossbars to a good width apart. The minimum width between the ski mounts is 24" (2 Feet) apart. Slide the ski mounts into the T slot of each crossbar, and make sure the T Nuts are sliding into the T slots properly. Once you have placed them where you want, tighten the (4) Wing Bolts by hand, and make sure the Wing Bolts are seating centered in the holes of each bracket.



STEP 3

When you are ready to mount your items, use the button to release the arm. There are two latches in the locking mechanism, the first latch allows you to clamp your item in with the ability to move it back and forth to make adjustments. The second latch is the final lock, which clamps the items in firmly. Once your items are placed where you want them to be, latch the arm firmly, making sure the lock has reached the second latch. When you are finished, you have the option to lock the mount using the keys provided.




STEP 4

The other mounting location is on our molle plate. The ski mounts sit vertically on the molle plate. Bolt the ski mounts to the molle plate using (2) of the provided bolts, nuts, and washers. Use a ratchet with a 9/16 socket and wrench and tighten the bolts. The molle plate can either be mounted to the 6" side arms or the telescoping arms of the rack. The ski mounts should be at a minimum of 24" (2 Feet) apart.



STEP 5

When mounting to the molle plate, make sure the ski mounts are mounted with the buttons facing down. Do not mount the ski mounts with the buttons facing up, because when the arms are released, it may swing open and hit the side of your truck.

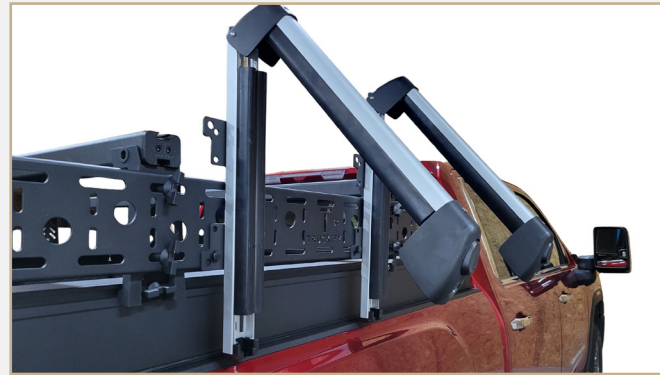

STEP 6

After mounting the ski mounts, you can now attach your items. Place your items in the mounts, close the arm to the first latch, and make adjustments if needed. After moving your items where you would like them, make sure the arms are latched to the second latch, this requires pushing them firmly in. When you are finished, you have the option to lock the mount using the keys provided.



STEP 7

After tightening your Wing Bolts, if they are stuck, you can use a screwdriver or a crescent wrench to loosen them.



Warning and Safety Instructions

- Do not attempt to mount anything greater than 1.5" in diameter, or anything greater than 20 pounds.
- Wing Bolts are only intended to be tightened by hand.
- Driving with loose bolts or fasteners can lead to serious injury or damage to equipment
- These ski mounts are not entirely protected against theft of the mounts, or anything mounted to them.
- Driving with ski mounts that are not latched properly could lead to items falling off, causing serious injury or damage to equipment.
- Failure to follow proper installation instructions could lead to serious injury or damage to equipment
- Do not haul items that reach past the width of the vehicles mirrors.
- The ski mounts should be mounted at a minimum of 24" (2 Feet) apart.

Replacement/new parts can be found on our website: [Truckify.com](https://www.Truckify.com)

- A16026 Wing Bolt T Nut Kit
- A26005 Ski/Fishing Pole Mount Kit

Returns

All returned products must have prior authorization from Truckify before they are shipped back to our facility. Returned products without pre-authorization are not eligible for credit. There will be a 20% restock fee on returned items. Products must be returned within 60 days of the date of sale to be eligible for credit. To request a return, go to our website, [Truckify.com](https://www.Truckify.com), under returns, to submit a return.

Warranty

This product comes with a limited one year warranty. Products manufactured by Truckify are warranted to be free of defects due to faulty material or workmanship for 12 months from the date of purchase. Normal wear and tear is not considered a defect in material or workmanship. Liability under this warranty is limited to the replacement of the defective part provided that the following conditions are met:

- Truckify is promptly notified in writing of such defect immediately upon discovery, and the defective product is returned for inspection
- The defect is not due, without limitation, to faulty installation, misalignment of the product, vibration, pressure pulsations, ordinary wear and tear, corrosion, ultraviolet degradation, operation outside the product specified limits and using the product for uses other than its intended use



877-885-4994
[Truckify.com](https://www.Truckify.com)
support@truckify.com
9479 County Road E,
Arpin, WI 54410

